


# FISHER® XTREMEV™ ADJUSTABLE V-PLOWS

**THE XTREMEV™ – 7½', 8½', and 9½', BLADE WIDTHS IN STAINLESS OR STORM GUARD™ POWDER COATED STEEL**

We've taken the best features of the rugged XBLADE™ and the popular EZ-V® snowplows and combined them to build the, industry-best, adjustable v-plow – the XtremeV™.

The XtremeV™ takes plowing efficiency to a whole new level. We've completely redesigned the blade, the hydraulics, the electrical system, the controls and the lights, to provide you with even greater performance and reliability.

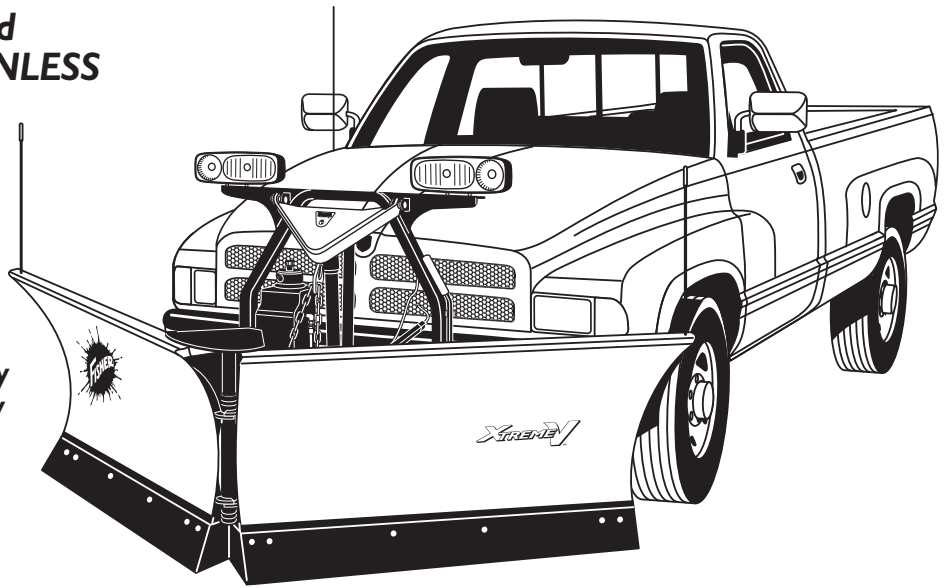

## FISHER DOUBLE ACTING CYLINDERS – Standard

These cylinders hold the wings firmly in place during back dragging. Even heavy snow won't force the wings to collapse as with spring return systems, which require optional cylinder kits in order to back drag effectively.

## XTREMEV™ HYDRAULICS PRODUCE INDUSTRY-BEST OPERATING SPEED!

The new XtremeV™ is a full 50% faster than its predecessor! It's also more reliable and simplified so it's easier to service.

## XTREMEV™ OPTIONAL ACCESSORIES INCLUDE:

Back drag edge, blade wing extensions, rubber deflector, bolt-on adjustable disc shoe kit, curb guards.

## XTREMEV™ CONTROLS

These are the only v-plow controls in the industry that hydraulically lock the blade wings together, and allow the operator to move both wings simultaneously, without having to push multiple control buttons.

Blade Width	Blade Height @ Blade End	Height @ Hinge	Blade Gauge	Number of Springs	Ribs	Angling Rams	Plowing Width @ Full Angle	Plowing Width @ Scoop	Plowing Width @ Full V	Standard Cutting Edge	Off-Truck Weight W/Blade	Wear Shoes (cast iron)
7'6" XV PC	30¾"	29"	12	4	12	1¾" x 11"	6'6"	6'3"	6'9"	¾" x 6"	821#	optional
7'6" XV SS	30¾"	29"	12	4	12	1¾" x 11"	6'6"	6'3"	6'9"	¾" x 6"	821#	optional
8'6" XV PC	31"	29"	12	4	12	1¾" x 11"	7'5"	7'1"	7'7"	¾" x 6"	876#	optional
8'6" XV SS	31"	29"	12	4	12	1¾" x 11"	7'5"	7'1"	7'7"	¾" x 6"	876#	optional
9'6" XV PC	33"	31"	12	6	12	1¾" x 11"	8'3"	7'11"	8'7"	½" x 6"	1005#	optional
9'6" XV SS	33"	31"	12	6	12	1¾" x 11"	8'3"	7'11"	8'7"	½" x 6"	1005#	optional

All plows include the INTENSIFIRE™ low-profile, dual beam halogen headlamps with combination park/turn signal lights that conform to federal safety standards and E-Force Isolation Module for improved long term performance of the light system. Vehicle light switch activates plow lights – no separate in-cab switch is needed.



FISHER ENGINEERING • 50 GORDON DRIVE • ROCKLAND, MAINE 04841 • [www.fisherplows.com](http://www.fisherplows.com)

