


FISHER® XLS™

X-PANDABLE LENGTH SNOWPLOW

From an 8-foot retracted straight-blade width, to a 10-foot expanded width, to a scoop width of nearly 9 feet, and a more effective windrowing configuration, the FISHER® XLS delivers a new level of versatility and profitable performance.

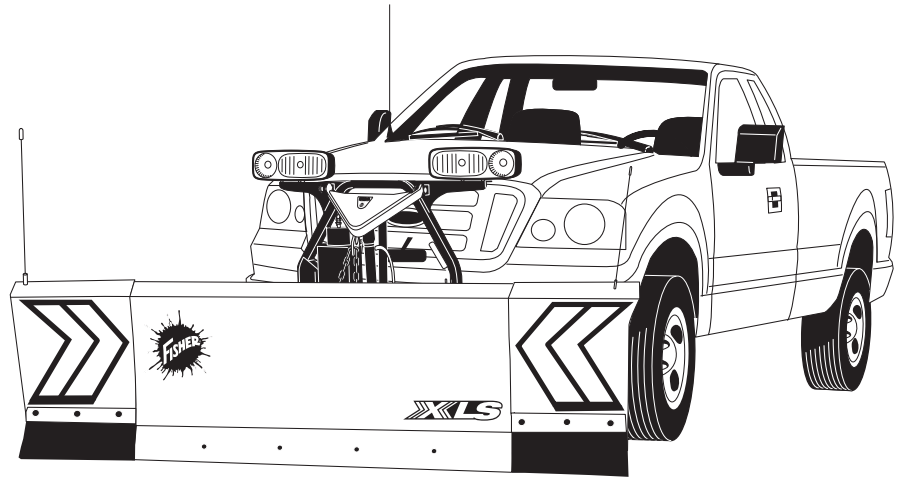

XLS ACCESSORIES INCLUDE:

Adjustable shoe kit, rubber deflector and 1/2" bolt-on cutting edge.

- **Proprietary** carries more snow.
- **Angled** scoop position maximizes handling and capacity when cornering or plowing around obstacles.
- **Deliver**atched windrowing productivity when leading wing is angled forward to direct snow into the moldboard, eliminating spill-off and effectively utilizing the entire blade.
- **Aggressive** attack angle provides a cleaner scrape and less need for de-icing.
- **Handheld** control with backlit directional buttons provides precise response. Individual buttons control each blade and wing function.
- **Flip** Edge design allows only the blade edge to trip when an obstacle is encountered, maintaining your load.
- **Equipped** with Fisher's Minute Mount™ 2 for easy, trouble-free attachment.

FEATURES	SPECIFICATIONS
Blade Width	
-Retracted	96" (8'0")
-Expanded	120" (10'0")
-Scoop	106" (8'10")
Blade Width (Full Angle)	86" / 108" / 95"
Blade Height	29"
Blade/Wing Gauge	12 ga / 12 ga
Cutting Edge (Optional)	1/2" x 6" Top Punch
Wing Cutting Edge Mtl.	Polyurethane
Ribs	
-Blade Center	6 Full Ribs; 2 Half Ribs
-Blade Wings	1 Full Rib (Each Wing)
Trip Springs	4 Compression
Angling Rams	1-1/2" x 10"
Blade Shoes (Optional)	Optional
Plow Weight (Plus Vehicle Mount)	985 lbs.
- Avg. 60 lbs.)	



FISHER ENGINEERING • 50 GORDON DRIVE • ROCKLAND, MAINE 04841 • www.fisherplows.com

